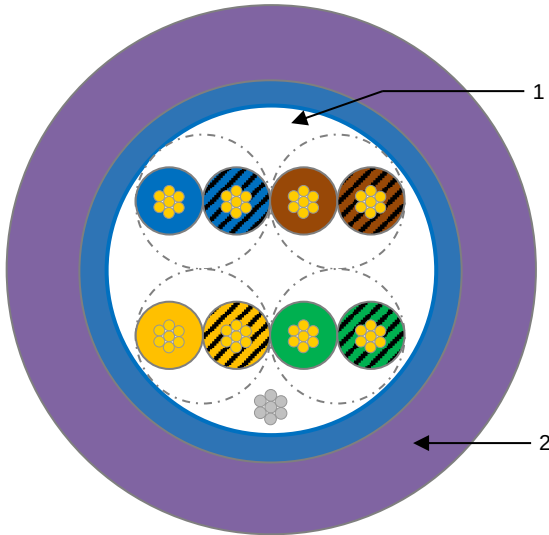


	1	2	3	4	5	6	7	8	9																																																																					
A	Part No: MEDUSA04		RoHS COMPLIANT 2011/65/EC								A																																																																			
	Customer Ref:																																																																													
	Quotation No: Q																																																																													
B				<table><tr><th>No</th><th>Description</th><th>Colr</th><th>Dia mm</th></tr><tr><td>1</td><td>1 Position Cat5e FTP Cable 26AWG (7/0.16mm) Plain Soft Copper Foamed Skin Polyethylene Insulated, 7/0.16mm Tinned Copper drain wire, Al/PET Foil Screen, PVC Jacketed to 5.20mm</td><td>BU</td><td>5.20 +/- 0.20</td></tr><tr><td>2</td><td>Jacket Polyether Polyurethane 85 Shore A UL94 V-2 Flame Retardant Halogen Free 1.00mm nom RTI</td><td>VT</td><td>7.20 +/- 0.30</td></tr></table>		No	Description	Colr	Dia mm	1		1 Position Cat5e FTP Cable 26AWG (7/0.16mm) Plain Soft Copper Foamed Skin Polyethylene Insulated, 7/0.16mm Tinned Copper drain wire, Al/PET Foil Screen, PVC Jacketed to 5.20mm	BU	5.20 +/- 0.20	2	Jacket Polyether Polyurethane 85 Shore A UL94 V-2 Flame Retardant Halogen Free 1.00mm nom RTI	VT	7.20 +/- 0.30	<table><tr><th colspan="2">Notes</th></tr><tr><td>Electrical Characteristics</td><td></td></tr><tr><td>Nominal Conductor Resistance</td><td>135 Ω/KM @ 20°C</td></tr><tr><td>Nominal Characteristic Impedance</td><td>100 Ω</td></tr><tr><td>Nominal Capacitance</td><td>50 pF/m</td></tr><tr><td>Attenuation @</td><td></td></tr><tr><td>1 MHz</td><td>30 dB/KM</td></tr><tr><td>10 MHz</td><td>100 dB/KM</td></tr><tr><td>20 MHz</td><td>140 dB/KM</td></tr><tr><td>100 MHz</td><td>300 dB/KM</td></tr><tr><td>SKEW Propagation delay difference (100 MHz)</td><td>Typical ≤400 ns/KM</td></tr><tr><td>Minimum Insulation Resistance</td><td></td></tr><tr><td>Core – Core</td><td>>900 MΩ/KM @ 500V</td></tr><tr><td>Core – Screen</td><td>>500 MΩ/KM @ 500V</td></tr><tr><td>Mechanical Characteristics</td><td></td></tr><tr><td>Maximum Operating Temp</td><td>+60°C</td></tr><tr><td>Cold Flex Temp</td><td>-20°C</td></tr><tr><td>Min Recommended Bend Radius</td><td></td></tr><tr><td>Static</td><td>30 mm</td></tr><tr><td>Dynamic</td><td>85 mm</td></tr><tr><td>Nominal Weight</td><td></td></tr><tr><td>In Air</td><td>49 KG/KM</td></tr><tr><td>In Sea Water @ SG 1.025</td><td>7 KG/KM</td></tr><tr><td>Print Details</td><td></td></tr><tr><td>Text:</td><td>Concept Cables Ltd England www.conceptcables.com Medusa Cat5e</td></tr><tr><td>Repeat:</td><td>500mm</td></tr><tr><td>Colour:</td><td>Black</td></tr></table>						Notes		Electrical Characteristics		Nominal Conductor Resistance	135 Ω/KM @ 20°C	Nominal Characteristic Impedance	100 Ω	Nominal Capacitance	50 pF/m	Attenuation @		1 MHz	30 dB/KM	10 MHz	100 dB/KM	20 MHz	140 dB/KM	100 MHz	300 dB/KM	SKEW Propagation delay difference (100 MHz)	Typical ≤400 ns/KM	Minimum Insulation Resistance		Core – Core	>900 MΩ/KM @ 500V	Core – Screen	>500 MΩ/KM @ 500V	Mechanical Characteristics		Maximum Operating Temp	+60°C	Cold Flex Temp	-20°C	Min Recommended Bend Radius		Static	30 mm	Dynamic	85 mm	Nominal Weight		In Air	49 KG/KM	In Sea Water @ SG 1.025	7 KG/KM	Print Details		Text:	Concept Cables Ltd England www.conceptcables.com Medusa Cat5e	Repeat:	500mm	Colour:	Black
No						Description	Colr	Dia mm																																																																						
1						1 Position Cat5e FTP Cable 26AWG (7/0.16mm) Plain Soft Copper Foamed Skin Polyethylene Insulated, 7/0.16mm Tinned Copper drain wire, Al/PET Foil Screen, PVC Jacketed to 5.20mm	BU	5.20 +/- 0.20																																																																						
2	Jacket Polyether Polyurethane 85 Shore A UL94 V-2 Flame Retardant Halogen Free 1.00mm nom RTI	VT	7.20 +/- 0.30																																																																											
Notes																																																																														
Electrical Characteristics																																																																														
Nominal Conductor Resistance	135 Ω/KM @ 20°C																																																																													
Nominal Characteristic Impedance	100 Ω																																																																													
Nominal Capacitance	50 pF/m																																																																													
Attenuation @																																																																														
1 MHz	30 dB/KM																																																																													
10 MHz	100 dB/KM																																																																													
20 MHz	140 dB/KM																																																																													
100 MHz	300 dB/KM																																																																													
SKEW Propagation delay difference (100 MHz)	Typical ≤400 ns/KM																																																																													
Minimum Insulation Resistance																																																																														
Core – Core	>900 MΩ/KM @ 500V																																																																													
Core – Screen	>500 MΩ/KM @ 500V																																																																													
Mechanical Characteristics																																																																														
Maximum Operating Temp	+60°C																																																																													
Cold Flex Temp	-20°C																																																																													
Min Recommended Bend Radius																																																																														
Static	30 mm																																																																													
Dynamic	85 mm																																																																													
Nominal Weight																																																																														
In Air	49 KG/KM																																																																													
In Sea Water @ SG 1.025	7 KG/KM																																																																													
Print Details																																																																														
Text:	Concept Cables Ltd England www.conceptcables.com Medusa Cat5e																																																																													
Repeat:	500mm																																																																													
Colour:	Black																																																																													
C											C																																																																			
D	Concept Cables Ltd ENGLAND www.conceptcables.com Medusa Cat5e 										D																																																																			
				This document is the property of Concept Cables Ltd and must not be copied, modified, re-printed or otherwise disclosed to any third party without written permission					TITLE 8C-1Cat5e-PU 7.20 VT		Page 1 of 1																																																																			
									DESCRIPTION Medusa 4 Cat5e																																																																					
									CUSTOMER																																																																					
	01	Update Print PFPC CC13750	CH	18/06/14																																																																										
	00	Quotation	SMO	09/06/14																																																																										
	ISSUE	DESCRIPTION	DRWN	DATE	APPD	DATE																																																																								